



Recommended Generator Report - 230DSHAD*

Project - Mason County Courthouse Option 2 Generator 1

Comments -

Project Requirements

Frequency, Hz	: 60.0	Generators Running in Parallel	: 1
Duty	: Standby	Site Altitude, ft(m)	: 1540(469)
Voltage	: 120/208, Parallel Wye	Site Temperature, °C	: 41
Phase	: 3	Max. Altr Temp Rise, °C	: 125
Fuel	: Diesel	Project Voltage Distortion Limit, %	: 10
Emissions	: EPA, stationary emergency application		

Calculated Individual Generator Set Load Running and Peak Requirements

Running kW	: 194.3	Max. Step kW	: 62.7 In Step 6	Cumulative Step kW	: 217.1
Running kVA	: 215.6	Max. Step kVA	: 142.5 In Step 6	Cumulative Step kVA	: 310.6
Running PF	: 0.9	Peak kW	: None	Cumulative Peak kW	: None
Running NLL kVA	: 7.0	Peak kVA	: None	Cumulative Peak kVA	: None
Alternator kW	: 197.71			Pct Rated Capacity	: 85.1

Generator Set Configuration

Alternator	: UCD3J	Engine	: QSL9-G2 NR3
BCode	: B413	Fuel	: Diesel
Excitation	: Shunt	Displacement, cu in. (Litre)	: 543.0(8.9)
Voltage Range	: UBR 208-240/416-480	Cylinders	: 6
Number of Leads	: 12	Altitude Knee, ft(m)	: 3600(1097)
Reconnectable	: Yes	Altitude Slope, % per 1000ft(304.8m)	: 6
Full Single Phase Output	: No	Temperature Knee, °F(°C)	: 104(40)
Increased Motor Starting	: No	Temperature Slope, % per 18°F(10.0°C)	: 15
Extended Stack	: No	Emissions	: EPA Tier 3
		Cooling Package	: high ambient

Set Performance

Load Requirements

Running At	: 85.1% Rated Capacity		
Max. Step Voltage Dip, %	: 11	Max. Allowed Step Voltage Dip	: 35 In Step 5
Max. Step Frequency Dip, %	: 4	Max. Allowed Step Frequency Dip	: 10 In Step 2
Peak Voltage Dip, %	:	Peak Voltage Dip Limit %	: 35.0
Peak Frequency Dip, %	:	Peak Frequency Dip Limit %	: 10
Site Rated Standby kW/kVA	: 228 / 285	Running kW	: 194.3
		Running kVA	: 215.6
Site Rated Max. SkW	: 233	Effective Step kW	: 175.8
Max. SkVA	: 770	Effective Step kVA	: 310.6
Temp Rise at Full Load, °C	: 150	Percent Non-Linear Load	: 3.0
Voltage Distortion	: 0.5	Voltage Distortion Limit	: 10
Site Rated Max Step kW Limit	:	Max Step kW	:

*Note: Higher temperature rise at full rated load.

*Note: All generator set power derates are based on open generator sets.

Specification sheet



Diesel generator set QSL9-G2 series engine

230 kW Standby



Description

Cummins® commercial generator sets are fully integrated power generation systems providing optimum performance, reliability and versatility for stationary Standby and Prime Power applications.

Features

Cummins heavy-duty engine - Rugged 4-cycle, industrial diesel delivers reliable power, low emissions and fast response to load changes.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings, low waveform distortion with non-linear loads and fault clearing short-circuit capability.

Control system - The PowerCommand® 2.3 electronic control is standard equipment and provides total generator set system integration including automatic remote starting/stopping, precise frequency and voltage regulation, alarm and status message display, output metering, auto-shutdown at fault detection and NFPA 110 Level 1 compliance.

Cooling system - Standard integral set-mounted radiator system, designed and tested for rated ambient temperatures, simplifies facility design requirements for rejected heat.

Enclosures - Optional weather protective and sound attenuated enclosures are available.

Fuel tanks - Dual wall sub-base fuel tanks are also available.

NFPA - The genset accepts full rated load in a single step in accordance with NFPA 110 for Level 1 systems.

Warranty and service - Backed by a comprehensive warranty and worldwide distributor network.

Model	Standby rating		Prime rating		Continuous rating		Data sheets	
	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz kW (kVA)	50 Hz kW (kVA)	60 Hz	50 Hz
DSHAD	230 (288)		209 (261)				D-3453	

Generator set specifications

Governor regulation class	ISO 8528 Part 1 Class G3
Voltage regulation, no load to full load	± 0.5%
Random voltage variation	± 0.5%
Frequency regulation	Isochronous
Random frequency variation	± 0.25%
Radio frequency emissions compliance	Meets requirements of most industrial and commercial applications.

Engine specifications

Bore	114.0 mm (4.49 in)
Stroke	145 mm (5.69 in)
Displacement	8.9 L (543 in ³)
Configuration	Cast iron, in-line 6 cylinder
Battery capacity	1500 amps minimum at ambient temperature of -18 °C (0 °F)
Battery charging alternator	100 amps
Starting voltage	12 volt, negative ground
Fuel system	Direct injection: number 2 diesel fuel, fuel filter, automatic electric fuel shutoff
Fuel filter	Single element, 10 micron filtration, spin-on fuel filter with water separator
Air cleaner type	Dry replaceable element
Lube oil filter type(s)	Spin-on, full flow
Standard cooling system	High ambient radiator

Alternator specifications

Design	Brushless, 4 pole, drip proof revolving field
Stator	2/3 pitch
Rotor	Single bearing, flexible discs
Insulation system	Class H
Standard temperature rise	150 °C Standby at 40 °C ambient
Exciter type	Torque match (shunt)
Phase rotation	A (U), B (V), C (W)
Alternator cooling	Direct drive centrifugal blower
AC waveform Total Harmonic Distortion (THDV)	< 5% no load to full linear load, < 3% for any single harmonic
Telephone Influence Factor (TIF)	< 50 per NEMA MG1-22.43
Telephone Harmonic Factor (THF)	< 3

Available voltages

Three phase reconnectable				Single phase non-reconnectable	Three phase non-reconnectable	
• 120/208	• 120/240	• 127/220	• 139/240	• 120/241	• 220/380	• 347/600
• 240/416	• 254/440	• 277/480				

Note: Consult factory for other voltages.

Generator set options and accessories

Engine

- 120/240 V 1500 W coolant heater
- 120/240 V 150 W lube oil heater
- Heavy duty air cleaner
- Engine oil temperature

Fuel system

- 12 hour sub-base tank (dual wall)
- 24 hour sub-base tank (dual wall)
- 473 L (125 gal) sub-base tank (single wall)

Alternator

- 105 °C rise
- 125 °C rise
- 120/240 V 100 W anti-condensation heater
- PMG excitation
- Single phase

Exhaust system

- Genset mounted muffler
- Heavy duty exhaust elbow
- Slip on exhaust connection

Generator set

- AC entrance box
- Battery
- Battery charger
- Enclosure: aluminium, steel, weather protective or sound attenuated
- Export box packaging
- UL 2200 Listed
- Main line circuit breaker
- PowerCommand Network Communications module (NCM)
- Remote annunciator panel
- Spring isolators
- 2 year Prime power warranty
- 2 year Standby power warranty
- 5 year Basic power warranty

Note: Some options may not be available on all models - consult factory for availability.

Control system PowerCommand 2.3



The PowerCommand 2.3 control system - An integrated generator set control system providing voltage regulation, engine protection, generator protection, operator interface and isochronous governing (optional).

Control – Provides battery monitoring and testing features and smart-starting control system.

InPower™ – PC-based service tool available for detailed diagnostics.

PCCNet RS485 – Network interface (standard) to devices such as remote annunciator for NFPA 110 applications.

Control boards – Potted for environmental protection.

Ambient operation – Suitable for operation in ambient temperatures from -40 °C to +70 °C and altitudes to 13,000 feet (5000 meters). Prototype tested - UL, CSA and CE compliant.

AC protection

- AmpSentry protective relay
- Over current warning and shutdown
- Over and under voltage shutdown
- Over and under frequency shutdown
- Over excitation (loss of sensing) fault
- Field overload
- Overload warning
- Reverse kW shutdown
- Reverse Var shutdown
- Short circuit protection

Engine protection

- Overspeed shut down
- Low oil pressure warning and shut down
- High coolant temperature warning and shut down
- Low coolant level warning or shut down
- Low coolant temperature warning
- High, low and weak battery voltage warning
- Fail to start (over crank) shut down
- Fail to crank shut down
- Redundant start disconnect
- Cranking lockout
- Sensor failure indication
- Low fuel level warning or shutdown
- Fuel-in-rupture-basin warning or shutdown

Operator/display panel

- Manual off switch
 - 128 x 128 Alpha-numeric display with push button access for viewing engine and alternator data and providing setup, controls and adjustments (English or international symbols)
 - LED lamps indicating genset running, not in auto, common warning, common shutdown, manual run mode and remote start.
- Suitable for operation in ambient temperatures from -20 °C to +70 °C

Alternator data

- Line-to-Neutral AC volts
- Line-to-Line AC volts
- 3-phase AC current
- Frequency
- kVA, kW, power factor

Engine data

- DC voltage
- Lube oil pressure
- Coolant temperature

Control functions

- Time delay start and cool down
- Glow plug control (some models)
- Cycle cranking
- PCCNet interface
- (4) Configurable inputs
- (4) Configurable outputs
- Remote emergency stop
- Battle short mode
- Load shed
- Real time clock with exerciser
- Derate

Digital governing (optional)

- Integrated digital electronic isochronous governor
- Temperature dynamic governing

Digital voltage regulation

- Integrated digital electronic voltage regulator
- 3-phase Line-to-Line sensing
- Configurable torque matching
- Fault current regulation under single or three phase fault conditions

Other data

- Genset model data
- Start attempts, starts, running hours
- Fault history
- RS485 Modbus® interface
- Data logging and fault simulation (requires InPower service tool)
- Total kilowatt hours
- Load Profile

Options

- Auxiliary output relays (2)
- 120/240 V, 100 W anti-condensation heater
- Remote annunciator with (3) configurable inputs and (4) configurable outputs
- PMG alternator excitation
- PowerCommand for Windows® remote monitoring software (direct connect)
- AC output analogue meters
- PowerCommand 2.3 and 3.3 control with AmpSentry protection

For further detail on PC 2.3 see document S-1569.

For further detail on PC 3.3 see document S-1570.

Emergency Standby Power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Limited-Time Running Power (LTP):


Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.

Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

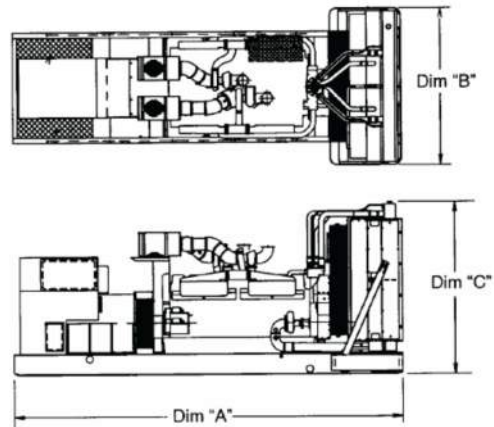

This outline drawing is for reference only.
See respective model data sheet for specific model outline drawing number.





Do not use for installation design

Model	Dim "A" mm (in.)	Dim "B" mm (in.)	Dim "C" mm (in.)	Set weight* dry kg (lbs)	Set weight* wet kg (lbs)
DSHAD	2667 (105.0)	1016 (40.0)	1372 (54.0)		1469 (3238)

*Weights represent a set with standard features. See outline drawings for weights of other configurations.

Codes and standards

Codes or standards compliance may not be available with all model configurations – consult factory for availability.

	This generator set is designed in facilities certified to ISO 9001 and manufactured in facilities certified to ISO 9001 or ISO 9002.		The PowerCommand control is Listed to UL 508 - Category NITW7 for U.S. and Canadian usage.
	The Prototype Test Support (PTS) program verifies the performance integrity of the generator set design. Cummins products bearing the PTS symbol meet the prototype test requirements of NFPA 110 for Level 1 systems.	U.S. EPA	Engine certified to Stationary Emergency U.S. EPA New Source Performance Standards, 40 CFR 60 subpart IIII Tier 3 exhaust emission levels. U.S. applications must be applied per this EPA regulation.
	All low voltage models are CSA certified to product class 4215-01.	International Building Code	The generator set package is available certified for seismic application in accordance with the following International Building Code: IBC2000, IBC2003, IBC2006, IBC2009 and IBC2012.

Warning: Back feed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device or after building main switch is open.

For more information contact your local Cummins distributor
or visit power.cummins.com

Our energy working for you.™



©2022 Cummins Inc. All rights reserved. Cummins is a registered trademark of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Inc. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice. S-1587.DOCX (02/22)

